

## **COMBI-PPT**

#### **Powered Pallet Truck**

Equipped with our patented multi-position tiller arm the Combi-PPT offers safer operation, maximum operator visibility and narrow aisle performance.












REF.	DESCRIPTION	Standard	Option
1	Max. Lift Height	95 mm	
2	Lowered Height	87 mm	
3	Overall Height	1050 mm	
4	Overall Length	2350 mm	2550 mm
5	Ground Clearance Under Fork	17 mm	
6	Ground Clearance to Centre of Wheelbase	20 mm	
7	Width	920 mm	
8	Outside Spread of Fork Arms	580 mm	
9	Track Front	370 mm	
10	Load Centre Distance	700 mm	
11	Overhang Front	330 mm	
12	Wheelbase	1800 mm	2000 mm
13	Overhang Back	220 mm	
14	Length From Face of Fork	950 mm	
15	Platform Length	1400 mm	1600 mm
16	Minimum Outside Radius	2000 mm	2200 mm
Α	Capacity	5000 kg	
В	Maximum Ground Speed	6 km/h	
С	Gradeability	5%	
D	Battery Capacity	24 V / 330 Ah	
Е	Fork Section	70 mm x 210 mm	
F	Front Tyre (Polyurethane)	OD 85 mm / Width 95 mm	
G	Rear Tyre (Vulkollan)	OD 313 mm / Width 125 mm	
Н	Standard Colour	Yellow & Grey	
- 1	AC Electric Traction Motor	24 V / 4 kW	
J	AC Electric Pump Motor	24 V / 5 kW	

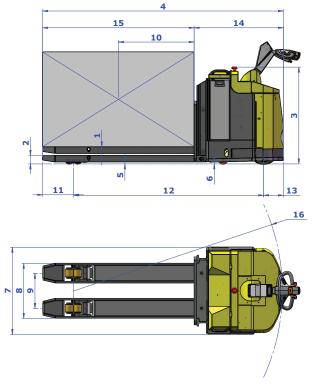

### Powered Pallet Truck


With a load capacity of 5000kg @ 700mm the Powered Pallet Truck (Combi-PPT) can work in the smallest operating aisles.

# Superior safety with Combilift's patented Multi-Position Tiller Arm

The tiller can be turned to the left or right to allow the operator to remain at the side. This



enables full visibility of the load and forks, while maintaining full steering control, providing greater awareness of the surroundings for enhanced overall safety.



Standing to the side of the truck eliminates the risk of being trapped or crushed while allowing the Combi - PPT to operate in very narrow aisles.

#### Features Include:

- Power Steering
- AC Motor Technology
- Rear Wheel Drive
- Patented Multi-Position Tiller Arm

Monaghan Ireland +353 47 80500 info@combilift.com

ombilift has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and/or dimensions may vary from those illustrated in some countries